


OXYGEN- oxygen gas
DANI Inc

OXYGEN, COMPRESSED USP UN 1072

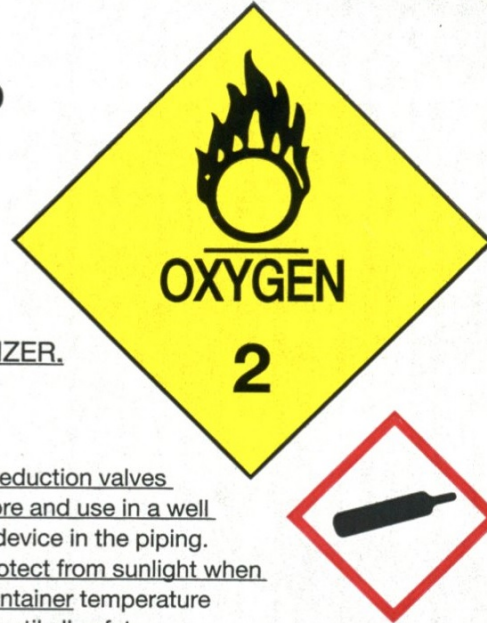

DANGER:

COMPRESSED, OXIDIZING GAS.
MAY CAUSE OR INTENSIFY FIRE; OXIDIZER.
CONTAINS GAS UNDER PRESSURE;
MAY EXPLODE IF HEATED.

In case of fire: stop leak if safe to do so. Keep reduction valves free from grease and oil. Open valve slowly. Store and use in a well ventilated place. Use a back flow preventative device in the piping. Close valve after each use and when empty. Protect from sunlight when ambient temperature exceeds 52 °C/125 °F. Container temperature should not exceed 52 °C/125°F. Do not handle until all safety precautions have been read and understood. Keep/store away from combustible materials. Use only with equipment cleaned for oxygen service and rated for cylinder pressure.

DO NOT REMOVE THIS PRODUCT LABEL.

For emergency use only when administered by properly trained personnel for oxygen deficiency and resuscitation. For all other medical applications, **Rx only**.

Uninterrupted use of high concentrations of oxygen over a long duration, without monitoring its effect on oxygen content of arterial blood, may be harmful. Use only with pressure reducing equipment and apparatus designed for oxygen. Do not attempt to use on patients who have stopped breathing unless used in conjunction with resuscitative equipment. Produced by Air Liquefaction.

Contents	Size
170 Liters	<input type="checkbox"/> M6
248 Liters	<input type="checkbox"/> C
415 Liters	<input type="checkbox"/> D
682 Liters	<input type="checkbox"/> E
6910 Liters	<input type="checkbox"/> H
_____ Liters	<input type="checkbox"/> Other

CAS NO: 7782-44-7

SIZE MD 15SCF/425 Liters

DANI Inc.

58 Walker Lane

Newtown, PA 18940-1888 USA

TEL: 1-800-423-1100 FAX: 1-888-423-1102

OXYGEN, COMPRESSED USP UN 1072

DANGER:

COMPRESSED. OXIDIZING GAS. MAY CAUSE OR INTENSIFY FIRE; OXIDIZER. CONTAINS GAS UNDER PRESSURE; MAY EXPLODE IF HEATED.

In case of fire: stop leak if safe to do so. Keep reduction valves free from grease and oil. Open valve slowly. Store and use in a well ventilated place. Use a back flow preventative device in the piping. Close valve after each use and when empty. Protect from sunlight when ambient temperature exceeds 52 °C/125 °F. Container temperature should not exceed 52 °C/125°F. Do not handle until all safety precautions have been read and understood. Keep/store away from combustible materials. Use only with equipment cleaned for oxygen service and rated for cylinder pressure.

DO NOT REMOVE THIS PRODUCT LABEL.

For emergency use only when administered by properly trained personnel for oxygen deficiency and resuscitation.

For all other medical applications, **Rx only.**

Uninterrupted use of high concentrations of oxygen over a long duration, without monitoring its effect on oxygen content of arterial blood, may be harmful. Use only with pressure reducing equipment and apparatus designed for oxygen. Do not attempt to use on patients who have stopped breathing unless used in conjunction with resuscitative equipment. Produced by Air Liquefaction. CAS NO: 7782-44-7

SIZE MD 15SCF/425 Liters

DANI Inc

58 Walker Lane

Newtown, PA 18940-1888 USA

TEL: 1-800-423-1100 FAX: 1-888-4231102

OXYGEN				
oxygen gas				
Product Information				
Product Type	HUMAN PRESCRIPTION DRUG	Item Code (Source)	NDC:70423-001	
Route of Administration	RESPIRATORY (INHALATION)			
Active Ingredient/Active Moiety				
Ingredient Name		Basis of Strength	Strength	
OXYGEN (UNII: S88TT14065) (OXYGEN - UNII:S88TT14065)		OXYGEN	990 mL in 1 L	
Packaging				
#	Item Code	Package Description	Marketing Start Date	Marketing End Date
1	NDC:70423-001-15	425 L in 1 CYLINDER; Type 0: Not a Combination Product	02/22/2016	

Marketing Information

Marketing Category	Application Number or Monograph Citation	Marketing Start Date	Marketing End Date
NDA	NDA205849	02/22/2016	

Labeler - DANI Inc (079726635)

Registrant - DANI Inc (079726635)

Establishment

Name	Address	ID/FEI	Business Operations
DANI Inc		079726635	manufacture(70423-001)

Revised: 2/2016

DANI Inc